










Excellent Adhesion

Highly Breathable

Silicone Water Repellent

Ready to Use

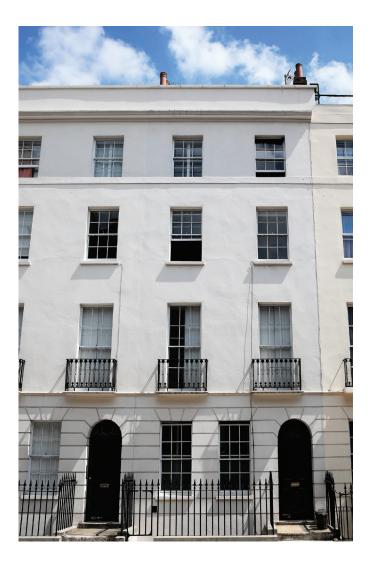

Through Coloured, Weatherproof Silicone Masonry Paint

ecorend SP77 Silicone Masonry Paint is a full Silicone resin-based, ready to use, high performance through coloured paint that is highly vapour permeable. Designed to give an ultra-high weatherproof finish whilst allowing the building to breathe. Excellent coverage rates dependent on substrate with outstanding covering power.

Approvals and Certificates

ETAG 004 & BS EN 1062-1: 2004

Technical Data

Pack Size	10L Bucket
Application Tool	Brush, Roller or Spray
Substrate Primer	ecorend SP77 - Diluted with up to 50% of clean water
Suitable Substrate	Concrete, Brick, Dash, Roughcast, Render, Bonded Paint & Coating
Humidity Requirement	Less than 85%
Coverage	Approx. 4 to 15m² per litre (Dependent on substrate)
Application Temperature	+5°C to 25°C for a minimum of 24 hours

UK CA Declaration of Performance



Wetherby Laroc Group Dalton Industrial Estate, Dalton, North Yorkshire YO7 3HE 14

ecorend SP77 Silicone Masonry Paint

Silicone resin-based paint for exterior masonry and concrete BS EN 1062-1: 2004

Maximum particle size	S1 (Fine)<100µm
Gloss	G3 (Matt)
Dry film thickness	E ₃ (100-200µm)
Water vapour transmission	V ₂ (Medium)
Liquid water permeability	W ₃ (Low) < 0.1 kg/(m2 h0.5)